

Venus V Series Curtain Tracking



V19 Series Light to Medium Duty Applications

Maximum loading
6 kg per track metre

27 mm



14,5 mm

outside bends only



500mm radius



100mm radius






Interval

Min.
Interval
300 mm






European
Design

Recommended
Top Fix only

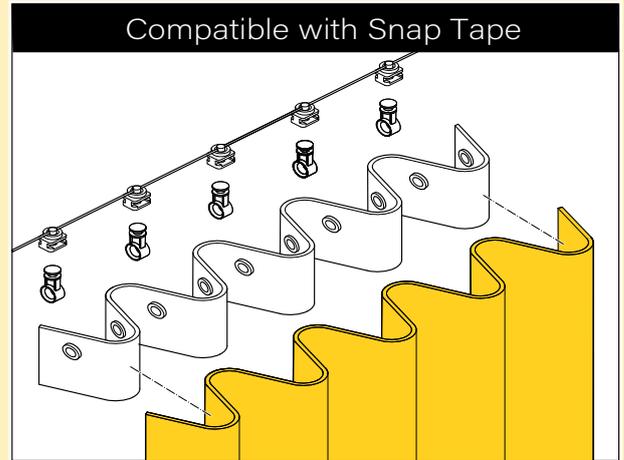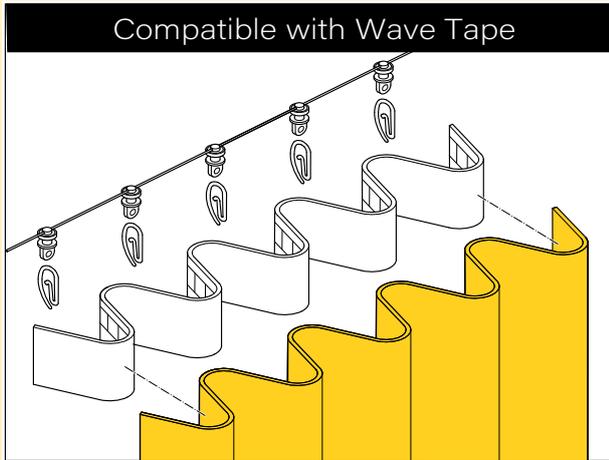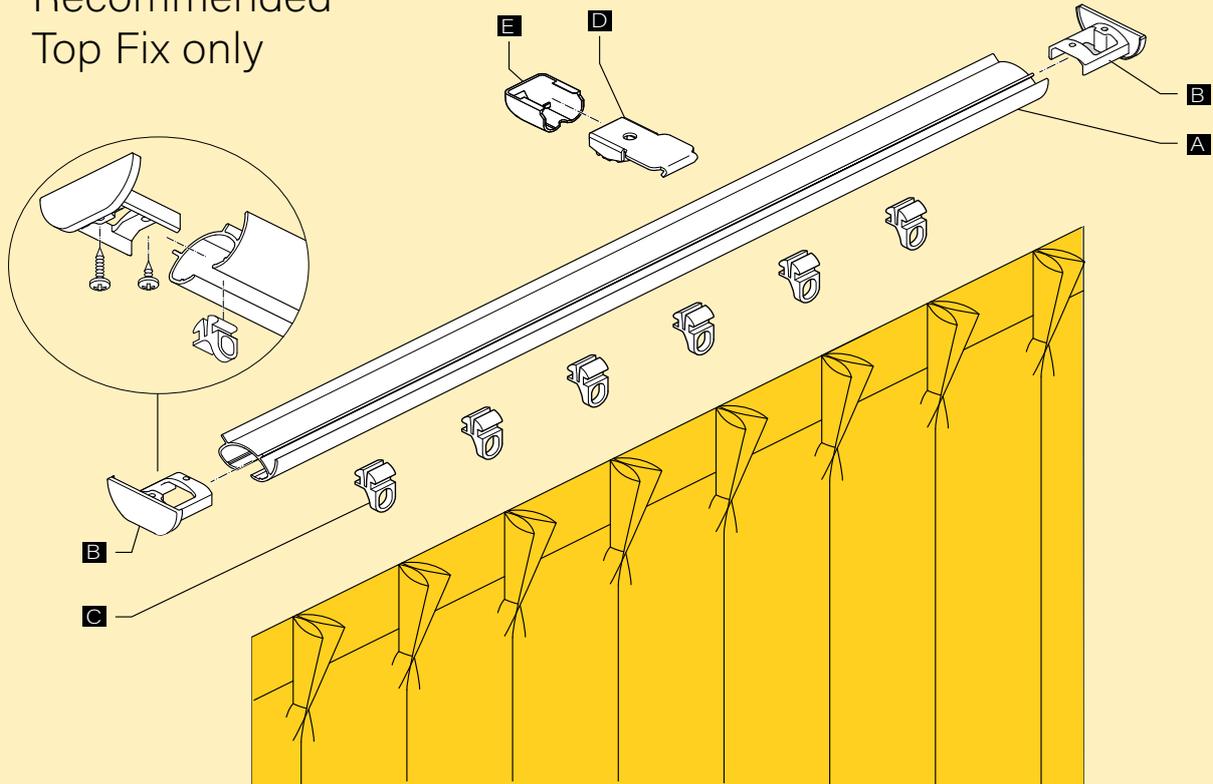


	 Light to Med		

- Hand draw
- Light to Medium Capacity
- Bendable
- Standard Colours:
White and Black
- Pleats and Ripple
- Glider and Roller

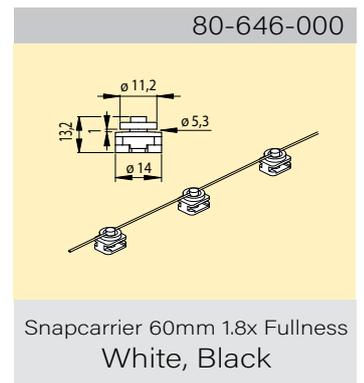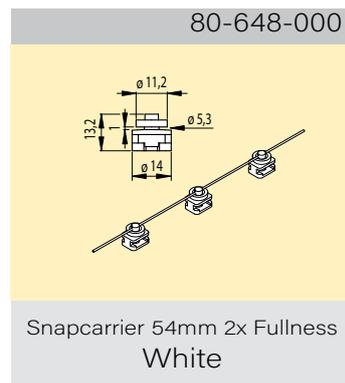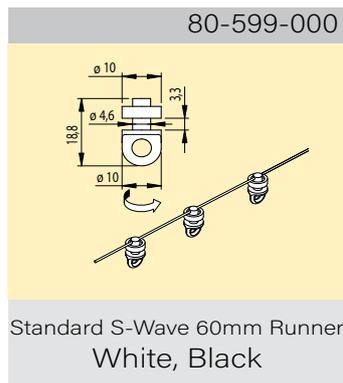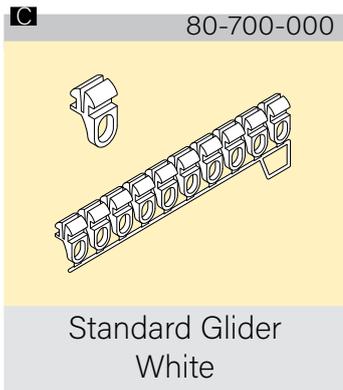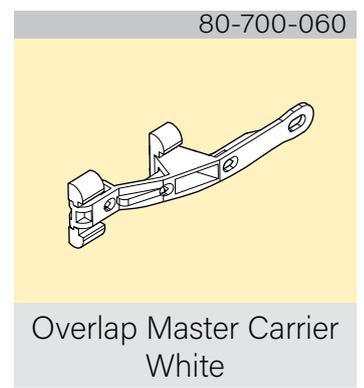

Capacity

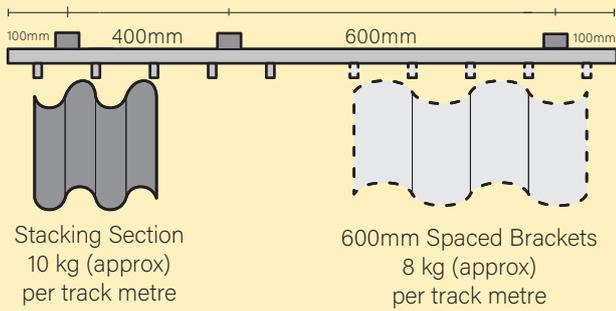

For 1 glider




1 kg (max)

Calculate maximum curtain load in track stacking sections. Do not exceed guidelines.

- Consider additional brackets at stacking points and before and after joins/bends.
- The capacity and fixing distances are provided as a guide.
- They may vary depending on fixing strength, additional fixing brackets in stacking areas, etc.

Glider Options/Dimensions

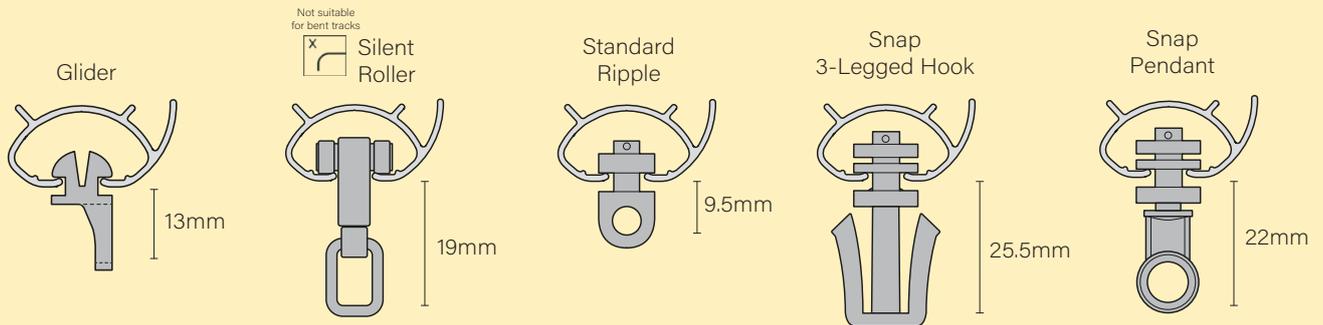

Bracket Options/Dimensions



3/14 Tennyson Road
Gladesville NSW 2111

02 9807 5588
sales@venus.com.au

